

**MEMORY DIALING**

To store a number in memory:

1. Press **MEM**.
2. Enter the **name**. Then press **▶**.
3. Enter the **phone number**. Then press **SELECT**. The number is now stored.

To dial a number from memory:

1. Press **◀** until you see the desired number.
2. Press **PHONE**. The displayed number will be dialed. Press **OFF** to end your call.

**CHANGING CHANNELS**

If you experience noise or interference during a conversation, press **PROG/CHAN** to switch to a clear channel.


**FLASH**


You can use your VT9161 cordless telephone with services such as Call Waiting. Press **PHONE/FLASH** to switch to the incoming call.

**PAGE**

From the base unit, press **PAGE** to signal the person at the handset.

VTECH COMMUNICATIONS LTD.  
**vtech**

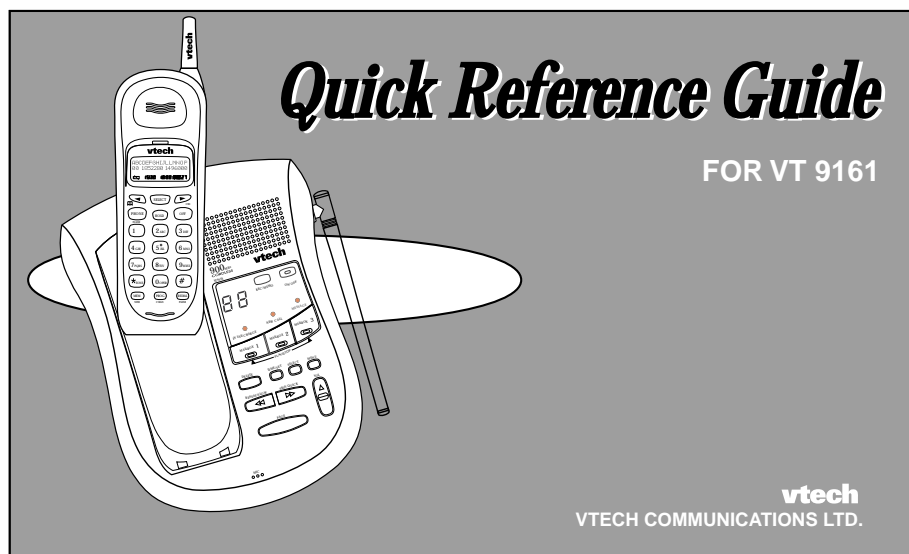

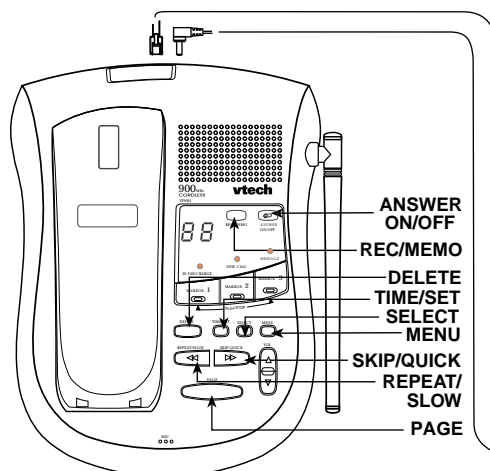

## 1. POWER UP:


**ANSWER ON/OFF** LED illuminates at power up

## 2. ITAD Programming Overview

1. Set Outgoing Message
2. Set Security Code
3. Set Day and Time
4. Set Audible Message Alert
5. Set Announce Only
6. Set Base Ringer
7. Set Number of Rings




## RECORDING OUTGOING ANNOUNCEMENTS

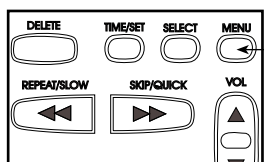


1. Press **MENU** ( "-" LED flashes during set-up). Prompt: "Set Outgoing Message".
2. Press **REC/MEMO** to record announcement. Prompt: "Now Recording". Record your announcement.
3. Press **MAILBOX X(1,2 or 3)** to stop recording. Your announcement will automatically be played back, followed by a beep.

## SET SECURITY CODE

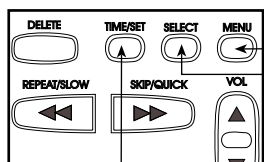


1. Press **MENU** twice. Prompt: "Set Security Code" (default setting is 19).
2. Press **SELECT**. Prompt will give current security code. Continue to press **SELECT** until desired security code is reached (00-99). Short press increase code by 1. Holding **SELECT** continuously will increment code by 10.
3. Press **TIME/SET**. Prompt: "Security Code is XX".

## SET DAY & TIME

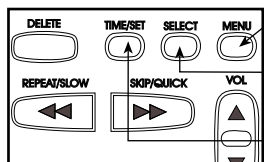


1. Press **MENU** 3 times. Prompt: "Set Day & Time".
2. Press **SELECT**. Voice cycles through **days** of the week as you keep pressing **SELECT**. Stop at desired day.
3. Press **TIME/SET**. Voice cycles through the **hours** as you keep pressing **SELECT**. Stop at desired hour.
4. Press **TIME/SET**. Voice cycles through the **minutes** as you keep pressing **SELECT**. Stop at desired minute. **NOTE:** holding **SELECT** key continuously increases minutes by 10.
5. Press **TIME/SET**. Voice will repeat the selected DAY & TIME.

## SET AUDIBLE MESSAGE ALERT

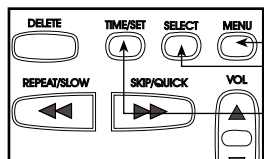


1. Press **MENU** 4 times. Prompt: "Set Audible Message Alert".
2. Press **SELECT**. Prompt: "ON" (or "OFF").
3. Pressing **SELECT** toggles between ON and OFF.
4. Press **TIME/SET**. Prompt: "Audible message Alert ON" (or "OFF").

## SET ANNOUNCE ONLY

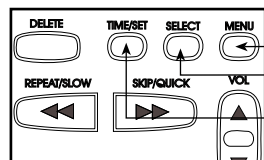


1. Press **MENU** 5 times. Prompt: "Set Announce Only".
2. Press **SELECT** until desired setting "on" or "off" is declared.
3. Press **TIME/SET**. Prompt: "Announce Only" is ON (or OFF).

## SET BASE RINGER

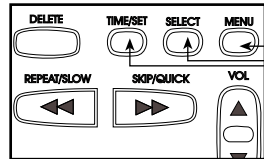

1. Press **MENU** 6 times. Prompt: "Set Base Ringer".
2. Press **SELECT**. Prompt: "ON" (or "OFF").
3. Press **SELECT** to toggle between ON and OFF.
4. Press **TIME/SET**. Prompt: "Base Ringer is on (or off)".

## SET # OF RINGS

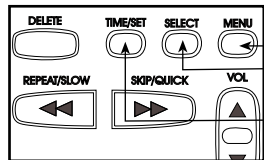

1. Press **MENU** 7 times. Prompt: "Set Number of Rings".
2. Press **SELECT**. Voice cycles through "2, 4, 6, Toll Saver". Press **SELECT** until you reach desired setting.
3. Press **TIME/SET**. Voice will repeat selected Ring setting.

Press any **MAIL BOX** key to exit set-up mode at any time.