OPERATION & MAINTENANCE



ARMALITE'S AR-180

COVER


Safety Precautions

- Always handle any gun as if it were loaded.
- Keep on safety at all times except when intending to fire.
- Before use, check that the barrel is free of any obstruction. ALWAYS check after a fall.
- 4. Be particularly careful when unloading the rifle to check the chamber after the magazine has been removed to assure a live round does not remain in the rifle.
- Never point a gun in other than a "safe" direction even if you know it is empty.


INTRODUCTION

1-1. DESCRIPTION AND DATA

1-2. DESCRIPTION. The AR-180 rifle is a light-weight, air coaled, gas operated rifle; magazine fed and designed for semi-automatic fire only. Each rifle is provided with two 5-round magazines, sling and cleaning rod.
1-3. The barrel is air-cooled and is provided with a flash suppressor and recoil compensator. The barrel is surrounded by a heat resisting fiberglass material, which serves as a handguard and forearm. The handguard has a heat reflecting metal inner shield.
1-4. The front sight is adjustable for elevation and the rear sight for windage.
Fig. No. 1 & 2.

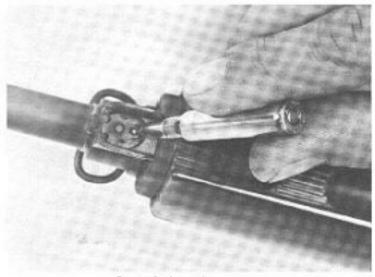


Front Sight Adjustment Figure no. 1

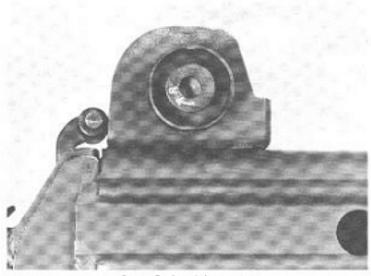

Rear Sight Adjustment Figure no. 2

1-5. The rifle has a folding buttstock for convenience in carrying and stowage. The buttstock and pistol grip are made of extremely durable, glass impregnated nylon of high impact strength unaffected by exposure. The stock may be folded by compressing the 2 spring loaded plungers with the thumb and forefinger at the same time exerting pressure to the left on the buttstock. The stock is then snapped into position on the snap fastener post. The stock is extended by striking the buttstock smartly with the palm of the hand. It will snap into position instantaneously. Fig. No. 3.

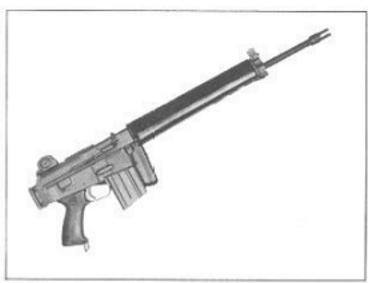

AR-13 Stock Folded Figure no. 3

1-6. The rifle is readily opened by pressing the guide spring plate forward, providing ready access for removal of the bolt carrier assembly and upper handguard. Fig. No. 4. It also provides accessibility to all otherworking parts for convenient cleaning and inspection. If ever required, the manual charging handle provides a means of forcing the bolt forward to full lock position or to extract a stuck case.



Disengage Takedown Figure no. 4

1-7. The bolt incorporates seven locking lugs. Upon closing, the bolt rotates to engage seven similar locking lugs in the barrel extension, thus, the full force of the ignition of the powder charge is absorbed by the barrel extension and bolt. No pressure is exerted upon the receiver. The receiver is made of light-weight steel stampings. The design contributes to a high degree of safety, durability and performance of the rifle. Due to the light weight, portability and convenience for carrying is greatly enhanced.

SPECIFICATIONS

Weight	
AR-180 Rifle without Magazine	7.2 lbs.
Empty Aluminum Magazine (20-rounds)	.2 lbs.
Loaded Magazine (20-rounds)	.7 lbs.
AR-180 Rifle with Loaded Magazine	7.9 lbs.
Length	20000000
Rifle with Flash Suppressor-Compensator	38 in.
Barrel	181/4 in.
Barrel with Flash Suppressor	19.8 in.
Mechanical Features	
Rifling, R.H. 6 grooves - 1 turn in 12"	
Bore Maximum	.2190
Groove	.2235
Sight Radius	19.5 in.
Trigger Pull	7.0 - 8.0 lbs.
Method of Operation	Gas
Type of Mechanism	Rotating Bolt
Ammuniton	10 00000
Caliber	5.56 mm (.223)
Firing Characteristics	
Muzzle Velocity (Average)	3250 fps
Muzzle Energy	1300 ft. lbs.
Chamber Pressure	50,000 psi
Maximum Rate of Fire Semi-Automatic	45/65 rds. per min.
Sustained Rate of Fire	12/15 rds. per min.
Maximum Range	2653 meters
Maximum Effective Range	460 meters

OPERATING INSTRUCTIONS

2-1. LOADING THE MAGAZINE. The magazine has been blocked to accept only 5 rounds. The magazine follower has a raised portion generally resembling the outline of a cartridge. Cartridges are loaded into the magazine so that the tips of the bullets point in the same direction as the raised portion of the follower.

2-2. LOADING THE RIFLE. The magazine may be inserted with the bolt and the bolt carrier open or closed.

WARNING

Set Selector Switch on "Safe." Hold the forearm of the rifle with the left hand, pointing the muzzle in a safe direction, with the right hand, insert a loaded magazine into the magazine housing. Push upward until the magazine latch engages and hold the magazine. Rap base of magazine sharply with heel of hand to assure positive retention. Check by attempting to withdraw the magazine without the use of the magazine release. If the action is open, grasp the charging handle with the right hand, pull to the rear thus disengaging the bolt stop and release the charging handle. A round will be stripped from the magazine and loaded into the chamber. If the action is closed when the magazine is inserted, pull the charging handle fully to the rear and release it. NOTE: Do not "ride" the charging handle forward. If the charging handle is eased forward from the open position, the bolt may fail to rotate and fully lock and it cannot fire. If the bolt fails to go all the way forward, push forward on the manual charging handle. The rifle is now loaded and ready to fire.

WARNING

Make Sure The Selector Lever Is On The "Safe" Position, If Not Ready To Fire.

2-3. The dust cover may be closed after a cartridge is chambered to keep out any foreign matter. The cover opens automatically with firing of the first round or by moving the charging handle slightly to the rear. It must be closed manually.

2-4. FIRING.

2-5. SEMI-AUTOMATIC POSITION. With the selector lever in this position, the rifle will fire one round each time the trigger is pulled.

2-6. WITH STOCK FOLDED. The selector lever must be positioned from the right side of the rifle, as the folded stock prevents access to the lever on the left side. Fig. No. 5.



AR-18 Stock Folded Figure no. 5

If it is desired to fire the rifle with the stock folded, the user should become fully familiar with the operation of the selector lever from the right side of the rifle. The forefinger of the right hand should be used to allow the continued proper hold on the pistol grip (a left-handed shooter would use the thumb of the left hand).

2-7. IMMEDIATE ACTION PROCEDURES FOR REMOVING A LIVE ROUND IN CASE OF FAILURE TO FIRE.

A. Wait 10 seconds then pull charging handle fully to the rear, observe for ejection of cartridge or cartridge case.

unloading instructions

2-8. Be sure the safety selector is on "safe". Remove the magazine. Fig. No. 6



Remove Magazine Figure no. 6

Eject any cartridge in the chamber by pulling charging handle to the rear. Inspect chamber.
Release the charging handle.
For positive safety; point the rifle in a

For positive safety; point the rifle in a safe direction, take off safe, pull the trigger, uncocking the hammer.

SIGHT ADJUSTMENT


Windage

2-9. In sight adjustment, windage adjustment is made by rotating the windage drum. Rotation of one notch in the direction of the arrow will change the point of impact of the bullet 1" to the right at 100 yards. Reversing the rotation will cause the bullet to strike to the left the same amount.

Elevation

2-10. Set the rear sight on normal setting for distances up to 300 yards. For distances beyond 300 yards, move the rear sight to the long range position.

2-11. Adjust the front sight by depressing the detent with a solid bullet point or punch and rotate the sight post. Rotating the post clockwise will raise the point of impact; reversing the direction will lower the point of impact. Each detent will change the point of impact 1" at 100 yards. Fig. No. 7.

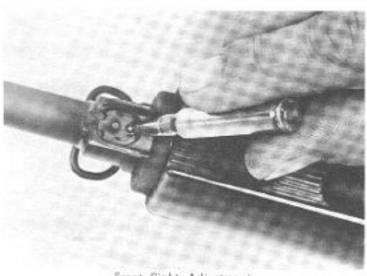

Front Sight Adjustment Figure no. 7

DISASSEMBLY/ ASSEMBLY

3-1. DISASSEMBLY. See Fig. 13 thru 28.
3-2. Push the guide rod plate forward at the same time pushing the plunger on the right hand side of the guide rod plate to the left clearing the rear sight. This will allow the guide rods to clear the rear of the receiver and the rifle will swing open. Fig. No. 8.



Disengage Takedown Figure no. 8

Release pressure gradually on the guide rod plate to preclude the springs forcing the guide rod plate and rods from jumping free of the receiver. Pull the charging handle to the rear, moving the bolt carrier in alignment with the enlarged rear section of the ejection port. Lift the charging handle free of the bolt carrier and receiver. The guide rod assembly, springs and bolt carrier may then be allowed to slide out of the upper receiver. Fig. No. 9, 10 & 11.



Disengage/Engage Takedown Figure no. 9




Withdraw/Insert Charging Handle Figure no. 10



Remove/Install Bolt Carrier, Guide Rods and Guide Rod Springs Figure no. 11

3-3. The bolt carrier assembly may then be stripped as illustrated on page 10.
3-4. Remove hand guard and disassemble operating rod assembly. Fig. No. 12. This will conclude field stripping, allowing access to all internal components.

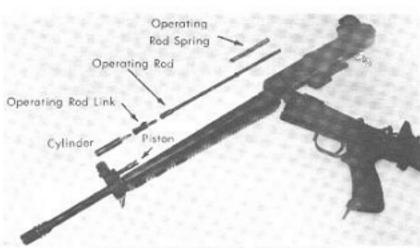

Remove/Install Operating Rad Assembly Figure no. 12


3-5. ASSEMBLY.

3-6. Reverse the above procedure.


NOTE: A) Upon reassembly, be sure that the bolt is fully extended forward until the locking lug is engaged. Pay particular attention not to bump the bolt forcing it to the rear when inserting the bolt assembly into the upper receiver. B) The hammer must be in the cocked position to close the rifle. C) Be sure the bolt disconnect (Part No. 145, page 20,) is rotated in its forward position. It will otherwise stop the rifle from being closed and locked.D) Be careful that small parts are not lost during disassembly/assembly; particularly assure that the firing pin spring is installed. Assembly without this spring could cause Inadvertant firing of the cartridge if a primer was overly sensitive due to inertia impact of the firing pin upon bolt closure. See Fig. No. 22.




Rifle, 5.56m.m. AR-18 Major Groups Figure no. 13

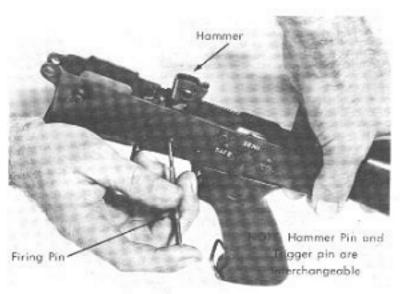


Remove/Install Hammer Pin Figure na. 14

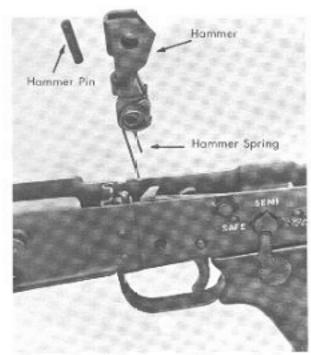


Remove/Install Hammer and Hammer Spring Figure no. 15

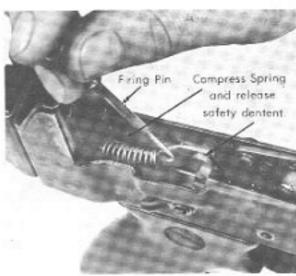

Disengage/Remove Selector Lever Figure na. 16

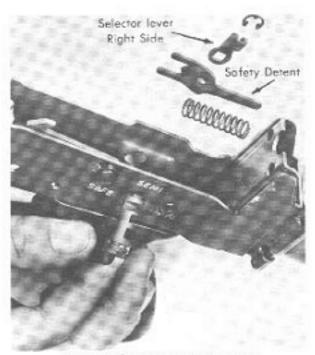


Disengage/Remove Selectar Lever Figure no. 17

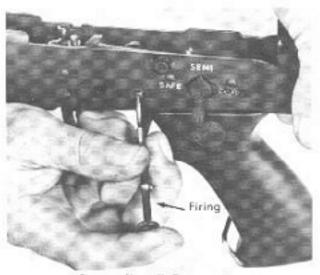


Remove/Install Trigger Pin Figure no. 18




Remove/Install Trigger Figure no. 19

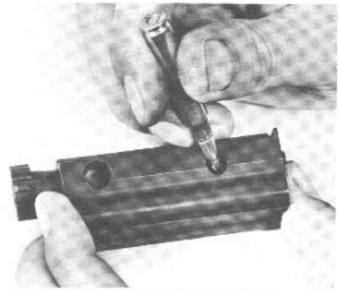


Remove/Install Firing Pin Retaining Pin Figure no. 20

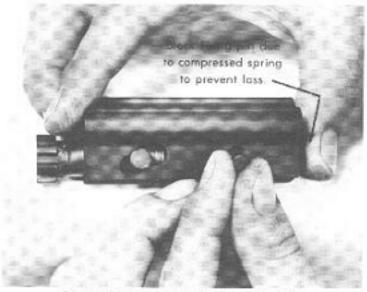


Remove/Install Firing Pin Retaining Pin Figure na. 21

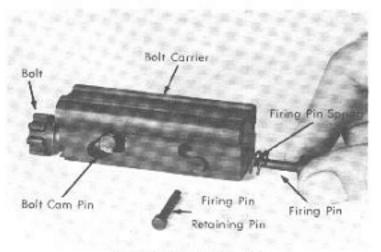


Remove/Install Firing Pin Figure no. 22

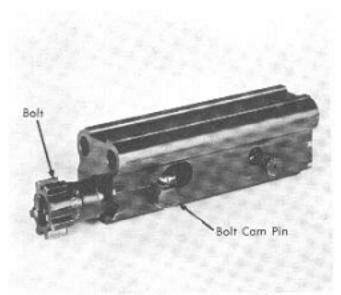


Remove/Install Bolt Cam Pin and Bolt Figure no. 23

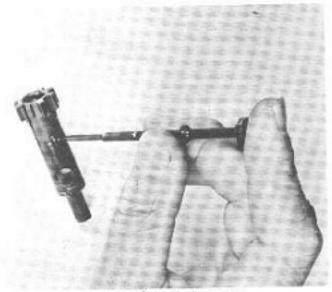


Remove/Install Extractor Figure no. 25

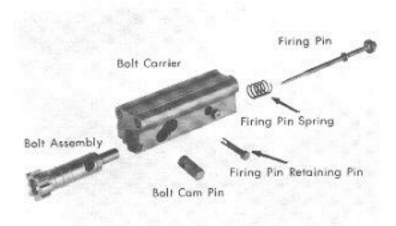

Bolt Carrier Group Parts Figure no. 24

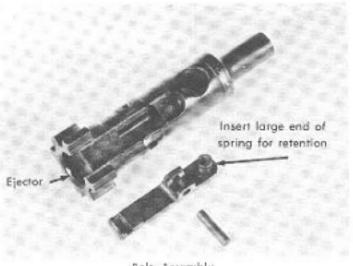

Bolt Assembly Figure no. 26

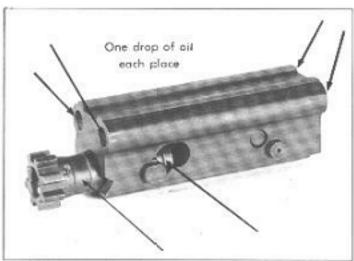

Cleaning and Lubricating the Bolt Carrier Group Figure no. 27



Disengage/Engage Receiver Pivot Pin Figure no. 28

MAINTENANCE INSTRUCTIONS

4-1. LUBRICATION

4-2. GENERAL. The rifle should be cleaned and lubricated at the end of each day's use, or when exposed to an excessive amount of dirt, grit or other foreign matter and/or water. For best continued operation, all surfaces should be protected by a very light film of oil, except under sub-zero temperatures when all oil should be removed from moving components. The rifle can function completely dry, although lack of lubricant is undesireable due to resultant excessive wear.

NOTE: Keep the gas piston clear of excess oil to prevent early formation of carbon.

4-3. CLEANING AND LUBRICATING THE BARREL.

A. Attach a brass wire brush to a cleaning rod, dip in solvent cleaning compound and brush the bore thoroughly. Do not submerge barrel in cleaning solution. Brush the bore from chamber to muzzle, using straight-through strokes. NOTE: DO NOT reverse direction of brush while inside bore. Push the brush through the bore until it extends clear of the muzzle. Continue until the bore is well covered with solvent. Remove the brush from the rod and dry the bore by pushing through clean, dry patches. Continue until patches come out clean and dry.

B. Clean the locking lugs in the barrel extension, just to the rear of the chamber. Brush the lugs with a small brush.

C. After cleaning, lubricate the bore with a lightly oiled patch to prevent corrosion and pitting. Lightly oil the lugs in the barrel extension. D. Remove the individual component parts of the operating rod. Wipe clean with oilsoaked patches. Use the cleaning rod with the brush to clean the gas piston. Remove any excess oil.

4-4. CLEANING AND LUBRICATING THE BOLT CARRIER GROUP.

A. Remove the bolt carrier group from the upper receiver. Field strip the bolt carrier group. Wash all external surfaces with a patch saturated in solvent cleaning compound. See Fig. No. 12, 20 thru 26.


B. Using a small brush dipped in solvent cleaning compound, scrub all carbon deposits and dirt from the locking lugs of the bolt, Pay particular attention to the area under the face of the extractor. Oil lightly. See Fig. No. 27.

ACCESSORIES


5-1. MAGAZINE.

5-2. MAGAZINE DIS-ASSEMBLY. Inspect the magazine and make sure it is empty. Depress the magazine spring through the hole in the magazine base plate, releasing the tip of the spring from the base plate.

Fig. No. 29 & 30.

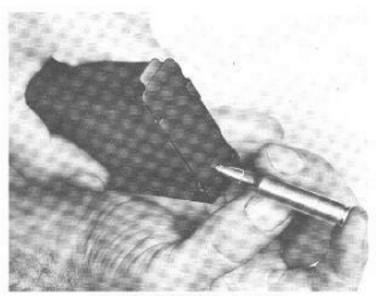

Disassomble/Assemble Magazine Figure no. 29

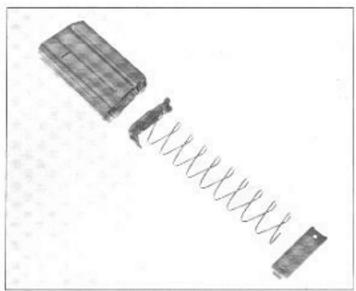

Disassemble/Assemble Magazine Figure no. 30

5-3. TELESCOPIC SIGHT. The telescopic sight is one of extremely durable design with outstanding optical capabilities made especially for Armalite, It is a true 2.75 power sight (normally termed 3X). The range knob on the top has 4 settings; one for 1-200 yards: 1 each for 300, 400 and 500 yards. This rapid and positive elevation system contributes greatly to practical usage. The protective cap on the top of the range adjustment knob is removed by the use of the head of a cartridge. Sight elevation adjustments are made under this cap by rotating the elevation knob with the head of a cartridge in the direction of the arrow to move the point of impact up. Fig. No. 31.



Figure no. 31

5-4. The sight incorporates an inverted post as well as fine cross-hairs. When "holding over" at extreme ranges, this precludes the post from blotting out the target. This comparatively heavy post allows positive point of aim at times of near darkness when the fine cross-hairs tend to disappear against the background.

5-5. The quick detachable mount allows immediate removal and returned installation Regardless of the number of times removed. due to the dove tail design of the base and mount, it will return to a postive zero. A tunnel under the sight allows use of the iron sights in case of any immediate requirement.

5-6. Dust covers are included and the fine lens should be protected by the use of these covers. This sight is invaluable for target identification purposes contributing greatly to


safety in the use of the firearm.

5-7. INSTALLATION, Hold the telescopic sight in the right hand, the forefinger compressing the safety lever on the front of the mount allowing it to clear the dove tail base on the rifle. The plunger at the rear of the mount is pressed firmly against the front of the rear sight compressing the spring, allowing the scope mount to slide forward on the base.


UPPER RECEIVER GROUP

Fig. No.	Mfg. Stock No.	DESCRIPTION	No.
1A	S2632	Assy, Weld & Rivet, Upper Receiver	Rifle
2 *	S2631	Receiver, Upper	1
3 *	2680	Housing, Rear Sight	i
4 *	2580	Extension, Barrel	1
5 *	2674	Guide Track, Upper Receiver	i
7 *	2840	Lug, Front, Dust Cover	î
8 *	2841	Lug, Rear, Dust Cover	1
9 *	2785	Plate, Scope Mount	Ŷ
10A	2679	Assy, Barrel to Upper Receiver	
11 *	S2632	Upper Receiver Weld & Rivet Assy	1
12 *	2626	Barrel	î
13A	2856		
14	2634	Assy, Front Sight	1
15	2776	Front Sight (Factory Installation Only)	i i
		Swivel Sling, Front Sight	
16A	2857	Assy, Piston Front Sight	1
17	2643	Piston, Front Sight	2
18	2763	Ring, Piston	3
19	2635	Blade, Front Sight	
20	2636	Plunger, Front Sight	1
21	2677	Spring, Plunger, Front Sight	1
22	2637	Taper Pin, Front Sight	2
23A	2855	Assy, Dust Cover	12
24A	2845	Weld Assy, Dust Cover	1
25 *	2837	Cover, Dust	1
26 *	2842	Cam Follower, Dust Cover	1
27	2844	Spring, Plunger, Dust Cover	1
28	2843	Plunger, Cam Follower, Dust Cover	. 1
29	2780-1	Roll Pin	1
30	2838	Spring, Hinge Pin, Dust Cover	1
30-1	2839	Hinge Pin, Dust Cover	1
31A	2717	Assy, Upper Hand Guard	
32 *	2629	Hand Guard Upper	1
33 +	2663	Liner, Upper Hand Guard	1
34	2779	Drive Screw	8
35A	2716	Assy, Lower Hand Guard	
36 *	2630	Hand Guard, Lower	1
37 *	2664	Liner, Hand Guard, Lower	1
38	2779	Drive Screw	1 8
39	2641	Operating Rod	1
			- 12

^{*} Indicates part of an assy not available separately.

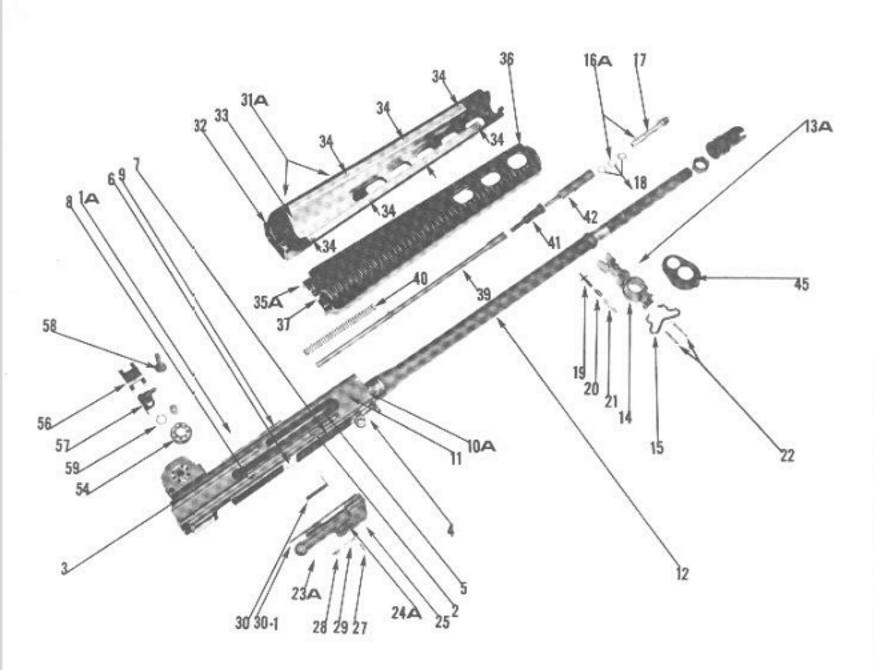


40 41 42 43 44 45 54 55 56 57 58 59 60	2678 2639 2642 2846 2775 2644 2685 2676 2682 2681 2683 2791 2853-1	Spring, Operating Rod Link, Operating Rod Cylinder, Operating Rod Nut, Recoil Compensator Recoil, Compensator Cap, Hand Guard Drum, Windage, Rear Sight Spring, Rear Sight Spring, Flat, Rear Sight Aperature, Rear Sight Screw, Windage Rear Sight Protector, Rear Sight Screw Snap Ring, Rear Sight	
	2000	BOLT GROUP	
61A 62 * 63 * 64 65 66 67 68A 69 * 70 * 71 72 73 74 75 76 77 78A 79 * 80 *	2705 \$2646 2684 2671 2715 2673 2590 2836 2594 2835 2667 2668 2666 2780-3 2669 2670 2665 2662 2660 2661 2764	Assy, Bolt Carrier Carrier, Bolt Pin, Press Fit, Bolt Carrier Firing Pin Spring, Firing Pin Takedown Pin, Bolt Pin, Cam Assy, Charging Handle Handle, Charging Key, Charging Handle Pin, Extractor Spring, Extractor Spring, Extractor Extractor Roll Pin, Ejector Ejector Spring, Ejector Bolt Assy, Stake, Guide Rod Forging, Plate, Guide Rods Guide Rod Plunger, Guide Rod Plate	1 1 1 1 1 1 1 1 1 1 1
82 83 84	2765 2780-1 2606	Spring, Plunger, Guide Rod Plate Roll Pin, Plunger, Guide Rod Plate Spring, Action	1 2

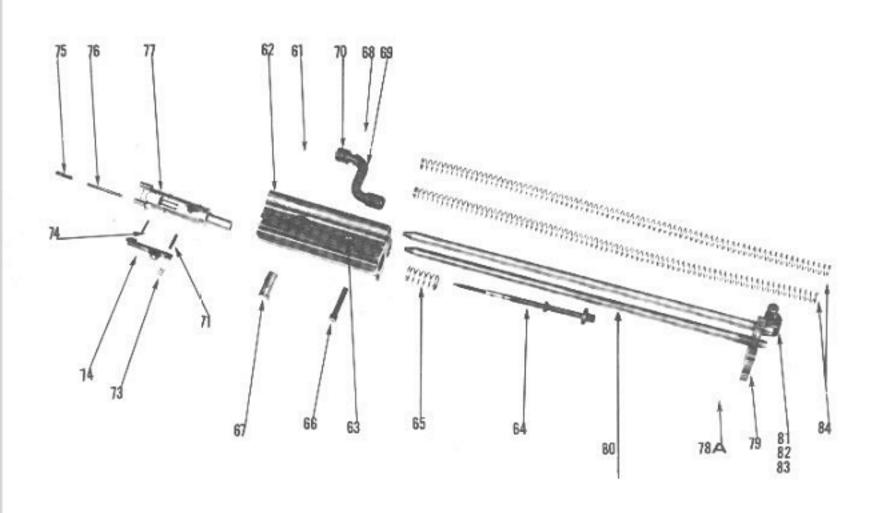

LOWER RECEIVER GROUP

85A	S2628	Assy, Weld & Rivet, Lower Receiver	
86	2687	Rivet, Trigger Guard	2
87A*	2858	Weld Assy, Trigger Guard	
88 *	2645	Trigger Goard	1
89 *	2623	Nut, Pistol Grip	1
90 *	2772-1	Post, Snap Fastener	1
91 *	2627	Receiver, Lower	1
92 *	2782	Bracket, Lower Receiver	1
93 *	2658	Bracket, Magazine Latch	1
94 *	2604	Bushing, Bolt Catch	1
95A*	2753	Weld Assy, Bulkhead	
96 *	27.44	Bulkhead, Receiver	1
97 *	27.46	Plate, Bulkhead	1
98A	2708	Assy, Buttstock	
99A*	2859	Assy, Fastener, Buttstock	
100 *	2614	Buttstock	1
101 *	2772-2	Cover, Snap Fastener	1
102 +	2772-5	Spacer, Snap Fastener	8
103 *	2772-4	Spring, Snap Fastener	8 2 1 4
104 *	2772.3	Plate, Snap Fastener	1
105 *	2772-6	Rivet, Snap Fastener	4
106 *	2852-1	Washer, Plain, Snap Fastener	4
107A	2860	Assy, Buttcap	
108 *	2618	Buttcap	1
109 *	2621	Recoil Pad	1
110	2774	Screw, Recoil Pad	2
111A	27.52	Weld Assy, Hinge, Buttstock	
112 *	2760	Hinge, Buttstock	1
113 *	2754	Nut, Buttstock Hinge	1
114	2620	Screw, Buttstock	1
115	2854-1	Snap Ring, Hinge Pin, Stock	1
116A	2861	Assy, Pistol Grip	
117 *	2617	Pistol Grip	1
118 *	2696	Sling, Swivel, Pistol Grip	1
119	2723	Washer, Plain, Pistol Grip	1

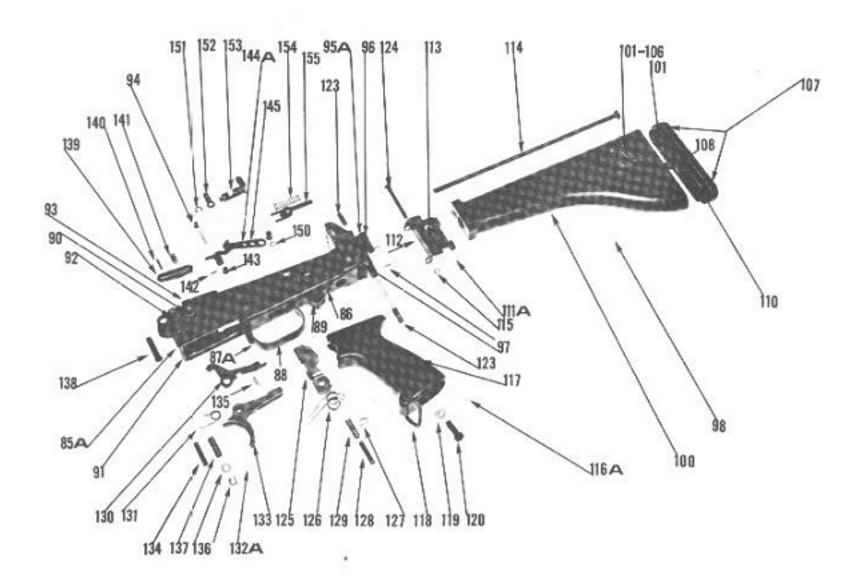

120	2622	Bolt, Pistol Grip	101
121	2780-2	Roll Pin, Plunger, Bulkhead	2
122	2762	Spring, Plunger, Bulkhead	1
123	2761	Plunger, Bulkhead	2 1 2
124	2586	Hinge Pin	1
125	\$2609	Hammer	1
126	2653	Spring, Hammer	1
127	2651	Snap Ring, Hammer, Trigger	2
128	2650	Pin, Hammer, Trigger	2 2 1
129	2610	Bushing, Hammer	1
130	2607	Disconnect, Trigger	1
131	2695	Spring, Disconnect	1
132A	2712	Assy, Riveted, Trigger	1.5
133 *	2647	Trigger	1
134 *	2608	Assy Pin, Trigger	1
135	2652	Spring, Trigger	1
136	2649	Spacer, Trigger	1
137	2648	Bushing, Trigger	1
138	2781	Takedown Pin, U & L Receivers	1
139	2657	Latch, Magazine	1
140	2780-4	Roll Pin, Magazine Latch	1
141	2702	Spring, Magazine Latch	1
142	2780-2	Roll Pin, Bolt Catch	1
143	2603	Retainer, Spring, Bolt Catch	i
144A	2601	Weld Assy, Bolt Catch	
145 *	2597	Bolt Catch	1
146 *	2599	Housing, Plunger, Bolt Catch	i
147	2602	Spring, Plunger, Bolt Catch	1
148	2600	Plunger, Bolt Catch	1
149	2605	Pin, Bolt Catch	i
150	2854-4	Snap Ring, Bolt Catch	i
151	2854-1	Snap Ring, Safety Lever	1
152	2768	Lever, Safety	1
153	\$2595	Casting, Safety	1
154	2701	Spring, Safety Detent	1
155	2598	Detent, Safety	1

ACCESSORIES

154	0/00	
156	2688	Magazine Assy, 20-Round
157	S2848	Five Round Insert
160	2773-5	Bipod
161	2864	Case, Bipod
162	2865	Scope, 2.75 x 20mm with Mount
163	2866	Cleaning Rod AR-18
164	2867	Bore Brush, Caliber .22 [For Cleaning Rod, AR-18 only)
165	2868	Sling



LITE 118 East 16th Street, Costa Mesa, California 92627 (714) 548-7701